

# 1, Operation

This light has 4 kinds of control models:1,DMX512 control 2, automatical operation,sound action, master/slave

## 2.1 Manue

When you press "Manue" switch, there is following manues:

- 1, A001: It's DMX address of this fixture and slave mode. You can press"UP" and "DOWN" to set it from d000 to d512 and press "ENTER" to confirm it.
- 2, AUxx:It's static colors. You can press"UP" and "DOWN" to choose the color and press "ENTER" to confirm it.You can refer following color sheet:

Auxx static color sheet							
Color	1	2	3	4	5	6	7
R	No			No		No	No
G		No		No		No	No
B			No		No	No	No

- 3, FF01-FF99;It's automatical operation effect1. You can press"UP" and "DOWN" to set the speed and press "ENTER" to confirm it.
- 4, CC01-CC99;It's automatical operation effect2. You can press"UP" and "DOWN" to set the speed and press "ENTER" to confirm it.
- 5, EE01-EE99; ;It's automatical operation effect3. You can press"UP" and "DOWN" to set the speed and press "ENTER" to confirm it.
- 6, F001-F010;No strobe
- 7, F011-F099: It's strobe. You can press"UP" and "DOWN" to set the speed and colors and press "ENTER" to confirm it.
- 8, AuTo:It's running all program.
- 9, Soud;It's sound action. You can press"UP" and "DOWN" to set the sound action's from VOL1~VOL9 to adjust the sensitivity. .
- 7, bLOP/BLON:It's sound action model. You can press" ENTER" and it shows


"OF" it means the light won't light tight;It shows "No" means if there is no sound,the light will light tight.

## 3.3 DMX channel list:

Channels	Function
Channel1:	dim
Channel2:	Red
Channel3:	Green
Channel4:	Blue
Channel5:	Strobe

0-9:No strobe; 10-255: the strobe speed from slow to fast.  
Channel6: 0-50 : allow the other 5 channels ; 51 - 100:the function of FF01-FF99;The speed can be adjusted by channels : 101-150 : the function of CC01-CC99; The speed can be adjusted by channels : 151-200: the function of EE01-EE99; The speed can be adjusted by channels;201-250: the function of AuTo;251-255:The function of Soud

## The function of wireless controller

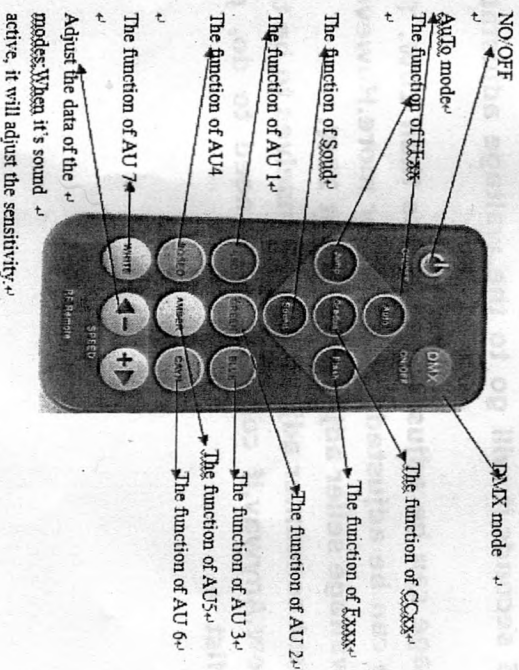

## Technical standard

6DMX512 channel

With wireless controller. The distance is about 30m

Working mode:DMX512,automatical operation, sound action, master/slave

Adop super bright 30W RGB 3-in-1 LED lamp

Source:1pcs\*30W(RGB 3-in-1)

Color temperature,less than 6000K

0-100%dimmer

Multi flash effecton:1-10times/s,gradually open and gradually close flash

Low power consumption, long working life(100,000 hours)

Voltage:AC90V-240V/50 or 60Hz

Power:40W

The light source for this product is 1pcs\*30W LED.However, the waltage is adjustable.When you press the menu switch to "A001" and then press the menu switch and enter switch together for 5 seconds,it will go to the waltage adjustable mode.

The mini waltage can be adjusted to be less than 10W. The Maxly waltage can be adjusted to be 45W or more.However, the standard waltage seller adjusted is about 25W.

We don't suggest consumer adjust it by themselves to be too high or too low.Anyway,if consumers do need to do, pls contact seller first

# USER MANUAL

## RGB 30W COB PAR CAN

1	2	3	4	5	6	7	8	9	10
11	12	13	14	15	16	17	18	19	20
21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	40
41	42	43	44	45	46	47	48	49	50
51	52	53	54	55	56	57	58	59	60
61	62	63	64	65	66	67	68	69	70
71	72	73	74	75	76	77	78	79	80
81	82	83	84	85	86	87	88	89	90
91	92	93	94	95	96	97	98	99	100

Pls read this user manual before you operate it